

Gable Homesheds™

REGION D



PRODUCT DETAILS

The Stratco Cyclonic (Region D) Gable Homeshed is designed with a tough galvanised and welded “C” section frame and is engineered and approved to Region C and D Cyclonic conditions. A 15° roof pitch ensures a cooler building for tropical Australia, as well as providing greater storage and headroom.

Single or double roller door configurations are available in the gable end which provides easy access for cars, boats and caravans.

The Stratco Cyclonic (Region D) Gable Homeshed features tough Stratco Superdek® wall cladding and Corrugated roof cladding for added strength and security. Gutters and downpipes in either Zinc/Al or prepainted colour steel finish are supplied as standard.

A full set of instructions for erection is available, or Stratco can recommend an independent qualified installer.

The Stratco Cyclonic (Region D) Gable Homeshed comes standard in two heights, 2.7m and 3.0m and has been designed for Region C & D, Terrain Category 2 areas in accordance with AS/NZS 1170.2-2002.


Stratco Cyclonic (Region D) Gable Homesheds™

Size	Width Overall *	Length Overall *	Door Openings Widths
C46	4.3	6.1	3.6
C47	4.3	7.6	3.6
C49	4.3	9.1	3.6
C66	6.9	6.1	2.9
C67	6.9	7.6	2.9
C69	6.9	9.1	2.9
C86	8.0	6.1	3.5
C87	8.0	7.6	3.5
C89	8.0	9.1	3.5

* Note: Width and length measured to outside of wall cladding.


SINGLE ROLLER DOOR

Models C46 to C49. Door opening width 1x 3.6m

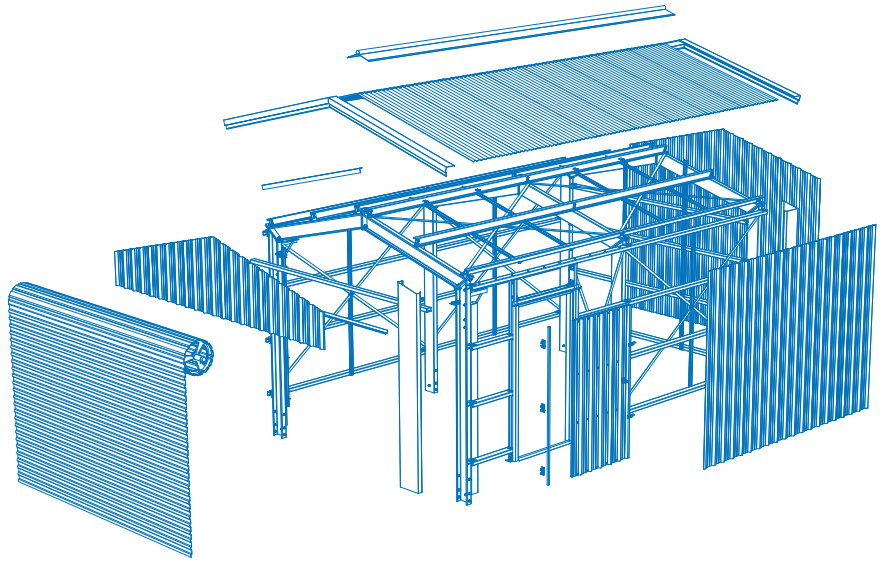

DOUBLE ROLLER DOOR

Models C66 to C69. Door opening width 2x 2.9m.
Models C86 to C89. Door opening width 2x 3.5m.

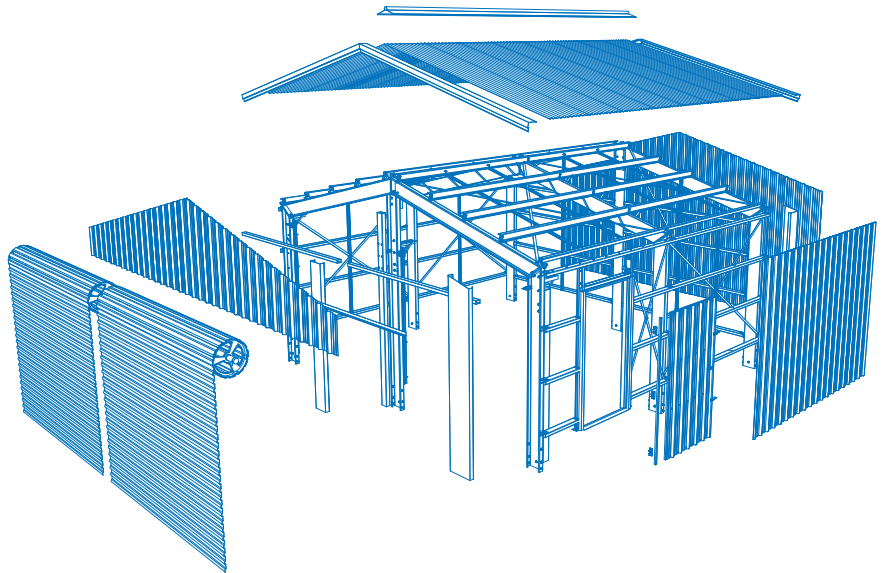

MAINTENANCE

Your Stratco Cyclonic (Region D) Gable Homeshed will maintain its good looks for even longer with a simple wash and wipe down with a soft broom. Stratco (Region D) Homesheds are produced from the highest quality materials and will provide many years of service if the important recommendations set out in the Stratco 'Selection, Use and Maintenance' brochure are followed.