

# Roofcap™ Batten



## FEATURES

The Stratco Roofcap™ Batten is an efficient way to re-roof commercial buildings. New roof sheets can now be installed directly over the existing roof, eliminating office or factory down time. Roofcap is positioned over the old roof sheets and fastens into the purlins, acting as the battens for the new roof, while providing a cavity for insulation to improve the thermal efficiency of the building.

Roofcap has been certified to the wind regions and spans for each roof cladding profile listed in the 'Specifications Table' for non-cyclonic regions.

- Allows you to re-roof a building without removing the existing sheets.
- No loss in production time for commercial properties during the re-cladding process as the workspace is not exposed to an open roof.
- Battens are available in multiple heights to accommodate different thicknesses of insulation.
- Battens are available to suit all Stratco and equivalent roofing profiles.
- Roofcap Battens are supplied in approximately 3m lengths to allow for existing roof sheet creep.


## ASSEMBLY

Battens are positioned over the existing roof sheet and fastened through the valleys into the roof purlins.

Battens are overlapped with a minimum of one bottom flange overlap, then fastened together using self-drilling screws through the pre-punched pilot holes.

Insulation with anti condensation properties can be fitted over the Roofcap Battens, before the new roof sheets are installed.


New roof sheets are fastened to the Roofcap Battens.

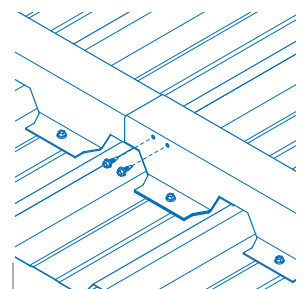

## SPECIFICATIONS

CONTACT

**1300 165 165**

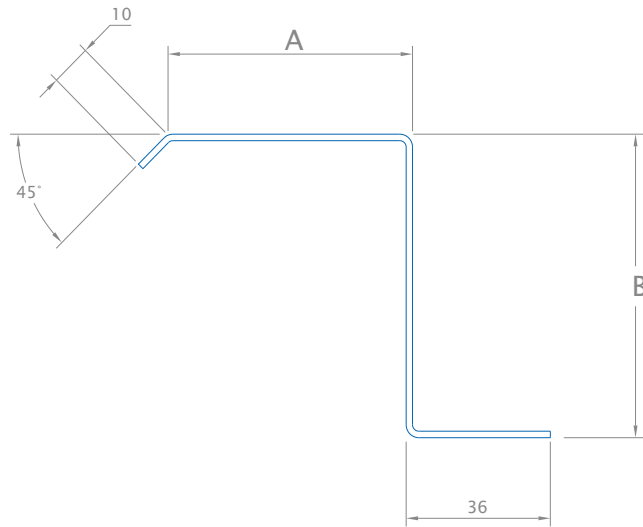

EXISTING ROOF CLADDING	PRODUCT CODE	INSULATION THICKNESS	DIMENSION 'A'	DIMENSION 'B'
TOPDEK® 700 or equivalent	RCBATOP753033GA	75mm	62mm	75mm
	RCBATOP553033GA	55mm	82mm	55mm
PRODEK® or equivalent	RCBAPRO753044GA	75mm	62mm	75mm
SUPERDEK® or equivalent	RCBASUP753048GA	75mm	67mm	70mm
	RCBASUP553048GA	55mm	67mm	50mm
	RCBASUP3048NIGA	NO INSULATION	67mm	40mm
SMARTSPAN® or equivalent	RCBASSP752975GA	75mm	62mm	75mm
	RCBASSP552975GA	55mm	62mm	55mm
	RCBASSP2975NIGA	NO INSULATION	62mm	45mm
CGI	RCBACGI752964GA	75mm	62mm	75mm
	RCBACGI552964GA	55mm	52mm	55mm
	RCBACGI2964NIGA	NO INSULATION	71mm	36mm

## MAINTENANCE

Maintenance should be performed as often as is required to remove any dirt, salt and pollutants. Where used in severely corrosive environments, cleaning should be performed more often. It is important that screws have the same life expectancy as the cladding you have specified.

Packs of Roofcap Battens should always be kept dry and stored above ground level while on site. If the sheets have become wet, they should be separated, wiped and placed in the open to dry.

Refer to the Stratco "Selection, Use and Maintenance" brochure, for more detailed information about the correct use and maintenance of this product.